

smarttechnology



All in one υπολογιστής με οθόνη αφής 17"



- MicroATX M/B with 4 x low profile PCI expansion slots
- Standard 250W SFX power supply
- Πλαινό USB and 7 σε 1 card reader
- Front access optical drive & FDD
- Hi-Fi Stereo speaker
- Ενσωματωμένο Μικρόφωνο
- Κομψό και μικρό σε μέγεθος
- Εύκολη συναρμολόγηση και service
- Εφαρμογές
 - Εκπαίδευση
 - Internet Café
 - Media Centers
 - Καταστήματα
 - Digital Signage
 - Ξενοδοχεία
 - Home Use

■ PC 117 - 117T

Specifications

Screen	:17' TFT LCD
Brightness	:260 cd/m2
Contrast Ratio	:450:01:00
Pixel Pitch	:0.264 x 0.264
View Line Angle	:Top/Down/Left/Right [70/70/70/70]
Optical Response Time	:16 ms
Support Color	:16.2M Colors [RGB 6 bit data]
Diskette Drive [option]	:3/5" x 1" 1.44 MB
Hard Drive [option]	:3/5" x 2' standard type
DVD or CD-rom [option]	:DVD-ROM, DVD+/-RW, CD- RW, COMBO [slim type]
Speaker	:Two build in 2.5 W stereo Speakers
LED Indicators	:Power ON, HDD access
M/B Form Factor	:Support Micro ATX M/B size 244mm x 244 mm
Size	:413x498x180 mm
Weight	:9.5 Kgs/21,3 lbs
EMI Certification	:FCC,CE
Safety Certification	:UL,CSA,TUV,3C
Power Supply	:AC 90-264 Volts, 50 60 HZ, 300W
Expansion Slot	:4x Low profile
Card Reader	:8 in 1
Touch Screen	:AMT Resistive AOPC117



Εξαιρετικό *design* και μικρό μέγεθος με οθόνη 20.1"



- MicroATX M/B with 4 x low profile PCI expansion slots
- Standard 300W SFX power supply
- USB and seven in one card reader
- Front access optical drive & FDD
- Hi-Fi Stereo speaker
- Integrated MicroPhone
- Sleek & compact design
- Easy to assemble, serve & customize for differentiation
- Εφαρμογές
 - Εκπαίδευση
 - Internet Café
 - Media Centers
 - Καταστήματα
 - Digital Signage
 - Ξενοδοχεία
 - Home Use

■ PC 120

Specifications

Monitor	:TFT PANEL
Size	:20.1" Wide (WSXGA + COLOR TFTLCD)
White Lum.	:300cd/□ 7.5mA (typ)
Contrast	:1000:01:00
Display Mode	:1680 * 1050 @ 60Hz
Pixel Pitch	:0.258 (per one triad) * 0.258 mm
View Angle	:160°
Response Time	:5.0ms (max 8ms)
Supported Color	:16.7M colors (RGB 6bits + HiFRC data)
Height Adjustable	:Range of 90mm
Tilt Angle	:Lowest point:0~10° & Highest point:0~15°
Hard Glass	:Frameless; 515.6mm * 341.6mm * 3.0mm
Chassis	:Standard MicroATX Motherboard
Low Profile Sfx	:300W, Auto Switch AC 100~240V, 50~60Hz
1 x External 3.5" Drive Bay (Card Reader, FDD, max depth 120mm)	
1 x External 5.25" Drive Bay (Optical Drive, max depth 190mm)	
1 x Internal 3.5" Drive Bay (HDD)	
2 x 2W Stereo Speakers	
4 x Low Profile Expansion Slots	
Blue Power ON LED & Orange HDD Access Signal LED	



SMT - 145 Τερματικός σταθμός Ασύρματου Internet



- Το SMT - 145 αποτελεί τη μοναδική λύση για 24ωρη παροχή internet. Το μόνο που χρειάζεστε είναι μια σύνδεση ADSL. Με το SMT - 145 οι πελάτες σας:
 - Επιλέγουν το χρόνο πρόσβασης που επιθυμούν
 - Εισάγουν τα χρήματα που επιθυμούν
 - Χρησιμοποιούν την απόδειξη που εκτυπώνεται για να συνδεθούν στο Internet (User name + password)
- Το SMT - 145 υποστηρίζει:
 - μέχρι 100 ταυτόχρονους χρήστες
 - μοναδική και τμηματική σύνδεση
 - Login Page
 - Redirection και Walled Garden
 - Τέσσερα 10/100 Ethernet LAN ports για ενσύρματη σύνδεση (24hr internet café) ή επέκταση σήματος μέσω repeaters

WiFi Kiosk

Specifications

Τεχνολογία

802.11b/g Wireless LAN

IP Plug and Play (Zero Configuratio)

Standard browser for user log in

NAT RFC 1631

SMTP Server Redirect

DHCP Server

Static IP/ DHCP client/PPPoE wan client

SSL User Login

Usage time lapse windows for user

VPN Pass through

Layer 2 isolation

Administration Access Control

Pass through IP/MAC/URL Address

Syslog

Κερματοδέκτης

Αναγνωρίζει όλα τα κέρματα βάσει διαμέτρου, πάχους και υλικού

Θερμικός εκτυπωτής

Πλάτος εκτύπωσης 48mm, αυτόματη τροφοδοσία

LCD Display

2 γραμμές

Εμφανίζει σύνολο ποσού, Error Messages, μήνυμα υποδοχής,

Κουμιά επιλογής

3 κουμιά για διαφορετικές επιλογές

1 κουμπί για ακύρωση και επιστροφή χρημάτων

1 κουμπί για επιστροφή χρημάτων σε περίπτωση εμπλοκής



■ File Server

File Server με optional CD/DVD Duplicator (3 to 1)

- Σύνδεση Ethernet και USB
- Αντιγράφει 1 CD/DVD σε 3 χωρίς λογισμικό
- Μία λύση για όλες τις ανάγκες αποθήκευσης και εγγραφής
- Gigabit Ethernet Σύνδεση
- Συνδέονται μέχρι και 4 επιπλέον εξωτερικοί σκληροί δίσκοι USB για πρόσβαση μέσω Ethernet
- 2 χρόνια εγγύηση
- Υποστηρίζει: CIFS (samba), FTP, NFS, AFP, RSYNC, iSCSI protocols, S.M.A.R.T., local user authentication, Software RAID (0,1,5) με WEB configuration interface



■ File Server

Specifications

Επεξεργαστής	:Intel Celeron 1.8 512K
Συνδεσιμότητα	:Gigabite Ethernet, 4x USB 2.0
Μνήμη	:KINGSTON DDRII 1GB 533MHZ
Κουτί	:Midi ATX 200 x 435 x 486 mm (WxHxD), 9 5,25", 2 ανεμιστήρες
Τροφοδοτικό	:450 W
Χωρητικότητα	
2TB	: 2 x HDD WD 1TB SATA II 7200RPM/16MB ή
3TB	: 3 x HDD WD 1TB SATA II 7200RPM/16MB ή
4TB	: 4 x HDD WD 1TB SATA II 7200RPM/16MB
Εξτρα	
Duplicator	:ARS-2030 3 to 1 Controller 20 x Recording
DVD RW	:DVDRW LG 20X SECURE L/SB



15" fanless Point Of Sale (POS)

- POS με δυνατότητες επιλογής διαφορετικών βιομηχανικών fanless μητρικών ανάλογα με τις ανάγκες σας.
- Πλήθος Αξεσουαρ
- Wi - Fi integrated
- Επιλογή Stand και open frame mechanical design



■ 15" POS

Specifications

Dimension 15" panel	:31 H x 376 W x 313 D mm
Case	:55 H x 319 W x 254 D mm
Weight	:5.3Kgs (Incl. M/B)
Storage	:2.5" HDD
Main board	:Embedded fanless
Max Memory	:DDR Ram 1GB
CPU	:Intel Celeron M 1GHz
LCD Panel	:AU
Resolution	:XGA 1024 x 768
Brightness(cd/m2)	:250
Contrast Ratio	:400:01:00
Number of Colors	:262144
Touch Screen	:AMT 8 wires / Resistance
Mounting Spec.	:VESA75 / 100
Panel water proof	:IP65
Slim CD-ROM	:PCI & Mini PCI
Expansion Slot	:Option with PCI
Extras	:Wireless Lan



42" LCD PC - Digital Signage



- 42" LCD οθόνη με ενσωματωμένο embedded PC system
- Μεγάλη αξιοπιστία
- Χαμηλή συντήρηση
- Εύκολη εγκατάσταση

■ Digital Signage

42'' LCD PC Specifications

System Information

- * Intel Pentium M/Celeron M CPU, 82852GM+ICH4 chipset
- * 1 x DDR up to 1GB
- * IDE / CF Socket
- * TV-OUT ,WDT/DIO, Audio Amplifier (Option), SPDIF
- * 1 x LAN Realtek 8100C 10/100M
- * 1 x PS/2 Keyboard & Mouse
- * 2 x USB 2.0
- * 2 x IEEE1394
- * 1 x Video-In
- * 1 x PCI & mini PCI
- * 1 x Audio Out RCA Jack L & R
- * Mounting Spec.: 600 x 200mm
- * Power Input: Rated Input 100V/240V, Voltage range 90~264Vac,
- * Current 100Vac, 240Vac/full load(3.4A), Frequency 47~63Hz
- * Power Output: Total 276W. DC24V / 8.0A; DC12V / 5.3A;
- * DC5VSB / 5A
- * Dimension: 120(H) x 1031(W) x 623(D) mm
- * Weight: 28Kg
- * Operating Temp: 0~40°C Fanless
- * Operating Humidity: 10~80% RH 50°C

42inches TFT LCD monitor

- * Display Colors: 16.7M
- * Number of Pixels: 1920 x 1080
- * Aspect Ratio: 16 : 9
- * Brightness: 500 cd/m
- * Contrast Ratio: 1500 : 1



Panel PC's από 8,4" μέχρι 17"



- Δυνατότητα επιλογής διαφορετικών βιομηχανικών fanless μητρικών ανάλογα με τις ανάγκες σας
- Επεκτασιμότητα (WiFi, memory, HD, Riser Cards)
- Εφαρμογές
 - POS
 - Βιομηχανικές Εγκαταστάσεις
 - Ειδικές Εφαρμογές

Panel Pc's

Specifications

	8,4''	10,4''	12,1''	15,1''	17''
LCD Panel	AU	LG.Philips	CHI-MEI	AU	AU
Main Board	Fanless Embedded				
Max Memory	DDR Ram 1GB				
CPU	Intel Celeron M 1GHz				
Resolution	SVGA 800 x 600	SVGA 800 x 600	SVGA 800 x 600	XGA 1024x768	WSXGA+ 1280 x 1024
Brightness(cd/m2)	220	220	185	350	300
Contrast Ratio	350:1	400:1	16,6673611	400:1	800:1
Number of Colors	262144	262144	262144	262144	16.7M
Touch Screen	AMT 4 wires / Resistance type	AMT 8 wires / Resistance type			
Mounting Spec.	VESA75 / 100				
Panel frame water proof	IP65				
Expansion Slot	No		PCI & Mini PCI		
Slim CD-ROM	No	No	Option with PCI	Yes	Yes



Fixation by front



Wall mount



Fixation by back

Fanless embedded systems



- Μικρό μέγεθος
- Αυξημένη διαθεσιμότητα
- Χαμηλή συντήρηση
- Λειτουργία σε απαιτητικές συνθήκες.
- Εφαρμογές
 - Networking (Servers, VPN, Firewalls)
 - Point of Sales (POS, info kiosks, ATM's, self service kiosks)
 - Surveillance / DVR
 - Multimedia (Video on demand, home entertainment, gaming)

■ Embedded Systems

Networking

Code	NET963A-I	NET945A-I	NET852A-I	NET700A-V	NET702A-V	NET763A-V	NET763B-V
Chipset	Intel 945GM/GM E	Intel 945GM/GM E	Intel 852GM/GM E	VIA CN700	VIA CN700	VIA CN700	VIA CN700
CPU	Intel Core Duo / Core 2 Duo	Intel Core Duo / Core 2 Duo	Intel Pentium M/ Celeron M- Dothan processor	VIA V4 BUS EDEN/C7	VIA V4 BUS EDEN/C7	VIA V4 BUS EDEN/C7	VIA V4 BUS EDEN/C7
FSB	533/667	533/667	400/533	400/533	400/533	400/533	400/533
Memory	2xDDR2 SODIMM(4G B)	2xDDR2 SODIMM(4G B)	1xDDR (1GB)	1xDDR2 (1GB)	1xDDR2 (1GB)	1xDDR2 (1GB)	1xDDR2 (1GB)
LAN	4	4	4	3	3	4	4
COM	1	1	1	2	2	1	1
USB	8	8	6	6	6	7	7
VGA	DVMT 3.0	DVMT 3.0	64MB shared	64MB shared	64MB shared	64MB shared	64MB shared
LPT	-	-	-	1	1	-	-
SATA	1	1	-	1	1	1	1
PCI	1	1	PCI-104 (option)	-	-	1	1
mini PCI	1	1	1	1	1	1	1
TV-OUT	NTSC/PAL	NTSC/PAL	-	NTSC/PAL (option)	NTSC/PAL (option)	NTSC/PAL (option)	NTSC/PAL (option)
Other Function	PCMCIA, WDT, 4 DI/DO	WDT, 4 DI/DO	LVDS	-	-	WDT, 4DI/DO, 2PCMCIA	WDT, 4DI/DO, 2PCMCIA
Form Factor	internal definition	internal definition	internal definition	internal definition	internal definition	internal definition	internal definition



surveillance/dvr

Multimedia

Code	SUR852A-I	SUR823A-V	MUL945A-I	MUL853AW-I	MUL852A-I	MUL853A-I	MUL700A-V	MUL823A-V
Chip-set	Intel 852GM/GME	VIA CLE266	Intel 945GM/GME	Intel 852GM/GME	Intel 852GME	Intel 852GM/GME	VIA CX700M	VIA CLE266
CPU	Intel Pentium M/ Celeron M-Dothan processor	EBGA VIA C3/EDEN	Intel Core Duo / Core 2 Duo	Intel Pentium M/ Celeron M-Dothan processor	Intel Pentium M/ Celeron M-Dothan	Intel Pentium M/ Celeron M	VIA V4 BUS EDEN/C7	EBGA VIA C3/EDEN
FSB	400/533	100/133	533/667	400/533	400/533	400/533	400/533	100/133
Memory	1xDDR (1GB)	1xDDR (512MB)	2xDDR2 SODIMM(4GB)	1x DDR (1GB)	2xDDR (2GB)	2x DDR (2GB)	1xDDR2 (1GB)	1xDDR (512MB)
LAN	1	1	1	1	1	1-2	1	1
COM	2	2 (1xRS485/422)	1	2	4	2-4	1	2
USB	6	4	8	6	6	6	5	4
VGA	64MB shared	64MB shared	DVMT 3.0	64MB	64MB shared	64MB shared	128MB shared	64MB shared
LPT	-	-	-	-	-	-	-	-
SATA	-	-	1	-	-	-	2	-
PCI	-	1	1	1	1	2	1	1
mini PCI	1	-	1	1	1	1	1	-
TV-OUT	NTSC/PAL	NTSC/PAL	NTSC/PAL	NTSC/PAL	NTSC/PAL	NTSC/PAL	NTSC/PAL	NTSC/PAL
Other Function	4-16 Video-in, WDT, 8 DI/DO, LVDS	4-16 Video-in, WDT, 4DI/DO	Video-in, WDT, 4 DI/DO, LVDS	Touch screen, WDT, 8 DI/DO, Wide range DC-IN, Video-in, IEEE1394, LVDS	LVDS	Touch screen, WDT, 8 DI/DO, IEEE1394, LVDS	Touch screen, WDT, 8 DI/DO, LVDS	2x IEEE1394, 1xVideo-in, SPDIF-OUT, LVDS
Form Factor	internal definition	internal definition	internal definition	internal definition	Flex ATX	mini ITX	internal definition	internal definition



■ Embedded Systems

POS

Code	POS94 5C-I	POS85 3CW-I	POS85 2CW-I	POS85 3CW-I	POS85 2C-I	POS70 0C-3V	POS70 0C-5V	POS70 0C-V	POS76 6C-V	POS86 3A-V
Chip-set	Intel 945GM /GME	Intel 852GM /GME	Intel 852GM /GME	Intel 852GM /GME	Intel 852GM /GME	VIA CX700 M	VIA CX700 M	VIA CN700	VIA CN700	VIA CLE26 6
CPU	Intel Core Duo / Core 2 Duo	Intel Pentiu m M/ Celero n M- Dotha n proces sor	Intel Pentiu m M/ Celero n M- Dotha n proces sor	Intel Pentiu m M/ Celero n M- Dotha n proces sor	Intel Pentiu m M/ Celero n M- Dotha n proces sor	VIA V4 BUS C7	VIA V4 BUS C7	VIA V4 BUS EDEN/ C7	VIA V4 BUS EDEN/ C7	EBGA VIA C3/ED EN
FSB	533/66 7	400/53 3	400/53 3	400/53 3	400/53 3	400	400/53 3	400/53 3	400/53 3	100/13 3
Mem- ory	2xDDR 2 SODIM M(4GB)	1x DDR (1GB)	1x DDR (1GB)	1x DDR (1GB)	1xDDR (1GB)	1xDDR 2 (1GB)	1xDDR 2 (1GB)	1xDDR 2 (1GB)	1xDDR 2 (1GB)	1xDDR (512M B)
LAN	2	2	2	2	1	1	1	1	1	4
COM	4	4-6	4 (1xRS4 85/422)	4	4	4-6	4-6	4 (1xRS4 85/422)	4-6	1
USB	8	5	5	5	6	4	5	7	7	4
VGA	DVMT 3.0	64MB shared	64MB shared	64MB shared	64MB shared	128MB shared	128MB shared	64MB shared	64MB shared	64MB shared
LPT	-	1	-	-	-	1	1	1	1	-
SATA	1	-	-	-	-	2	2	1	1	-
PCI	1	1	PCI- 104	1	PCI- 104 (optio n)	1	1	-	-	1
mini PCI	1	1	1	1	1	1	1	1	1	-
TV- OUT	NTSC/ PAL	-	-	-	-	NTSC/ PAL	NTSC/ PAL	NTSC/ PAL (optio n)	-	-
Other Functi- on	Touch screen , WDT, 4 DI/DO, LVDS	Touch screen , WDT, 8 DI/DO, Wide range DC- IN,LVD S	Touch screen , WDT, 8 DI/DO, Wide range DC- IN,LVD S	Touch screen , WDT, 8 DI/DO, Wide range DC- IN,LVD S	LVDS	Touch screen , WDT, 8 DI/DO, LVDS	Touch screen , WDT, 8 DI/DO ,LVDS	WDT, 8DI/D O	WDT, 8 DI/DO, LVDS	2PCMC IA
Form Factor	intern al definit ion	5.25 inch	intern al definit ion	intern al definit ion	intern al definit ion	3.5 inch	5.25 inch	intern al	intern al definit ion	intern al definit ion



Fanless Cases για embedded fanless μητρικές



- Μικρό μέγεθος και κομψός σχεδιασμός
- Επιδόσεις και χαμηλός θόρυβος χωρίς συμβιβασμό
- Δυνατότητα επιλογής διαφορετικών βιομηχανικών fanless μητρικών ανάλογα με τις ανάγκες σας
- Επεκτασιμότητα (WiFi, memory, HD, Riser Cards)
- Εφαρμογές
 - Thin Clients
 - POS
 - Network Application Storage
 - Digital Video Recorder
 - Automated Teller Machine
 - Firewall
 - Virtual Private Network
 - Video on Demand
 - Game Console
 - Car PC
 - Media Center
 - Digital Signage

Cases

CSE-T1



Technical Data:	
Dimension	68 H x 245 W x 177 D mm
Dimension (FI855A)	68 H x 245 W x 234 D mm
Dimension (2 x PCI)	110 H x 268 W x 182 D mm
Material	Aluminum
Color	Black
Weight	2.9 Kgs (Include M/B)
Storage Space	1 x 2.5" HDD +1 x PCI 104
	1 x 2.5" HDD +2 x PCI

CSE-TN1



Technical Data:	
Dimension	50 H x 275 W x 172 D mm
Material	Aluminum
Color	Black
Weight	2 Kgs (Incl. M/B)
Storage Space	1 x 2.5" HDD

CSE-L1




Technical Data:	
Dimension	48.5 H x 234 W x 175 D mm
Material	Aluminum + Plastic (Silver Cover)
Color	Blue / Silver
Weight	1 Kgs (Include M/B)
Storage Space	2.5" HDD x 1
LED Light	Power / Network / HDD
Front Connector	1 x USB, Mic-in, Lin-out

CSE-TW1




Technical Data:	
Dimension	75 H x 300 W x 200 D mm
Dimension (FI852A)	75 H x 300 W x 263 D mm
Material	Aluminum
Color	Black
Weight	2.9 Kgs (Include M/B)
Storage Space	1 x 2.5" HDD (available with 1 PCI Card)
	or 1 x 3.5" HDD
PCI Slot	1 (PCI riser card option)

Wall MountSeries

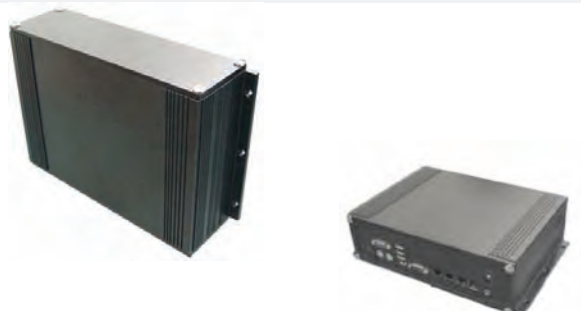

Technical Data:	
Dimension	74.7 H x 263 W x 178 D mm
Weight	2.2 Kgs (Incl. M/B)
Case material	Aluminum
Storage	2.5" HDD



Accessories για embedded systems



- Επέκταση λειτουργικότητας
- Riser Cards
- Power Boards
- Interface Exchange Cards
- Additional modules (ISDN, κλπ)

■ ES Accessories

Riser Cards



- * 1 PCI to 1 PCI PC I: V2.1 Dimension : 106 x 46mm
- * 1 PCI to 2 PCI PC I: V2.1 Dimension : 85 x 60mm
- * 1 PCI to 1 PCI PC I: V2.2 Dimension : 111 x 52.1mm
- * PCI104 to 3 Mini PCI PC I: V2.2 Dimension : 90.2 x 95.9mm
- * 1 PCI to 2 PCI Slot PCI: V2.2 Dimension: 115 x 39.5 mm
- * 1 PCI to 1 PCI PC I: V2.2 Dimension: 99 x 30 mm
- * IDE to SATA Chipset: ARC722 Serial ATAII Bridge Chip
- * IDE to SATA card 40Pin IDE Cable to SATA Chipset: ARC722 Serial ATAII Bridge Chip Dimension: 65 x 35.5 mm
- * IDE to SATA card 44Pin IDE to SATA Chipset: ARC722 Serial ATAII Bridge. Dimension: 65 x 35.5 mm
- * IDE to SATA card. Chipset: ARC722 Serial ATAII Bridge Chip Dimension: 65.5 x 22 mm
- * IDE to SATA card. Chipset: ARC722 Serial ATAII Bridge Chip Dimension: 65.5 x 31 mm

Power Boards



- * DC-In : 12V in DC-Out : ATX 3.3 / 5 / 5VSB / +(-)12V Max : 5 A Power : 60W
Dimension : 180 x 25 mm
- * DC-In : 14-19V in DC-Out : ATX 3.3 / 5 / 5VSB / +(-)12V Max : 10 A Power : 120W
Dimension : 170 x 40 mm
- * DC-IN: 9V-32V in DC-OUT: 12V Max: 4A Power: 48W Dimension: 60x40 mm
- * DC 12V in converter to ATX power DC-in: 12V DC-out: +12V / +5V / +3.3V / -12 / +5V Max: 5A Power: 60W Dimension: 30 x 50 mm

Interface Exchange Cards



- * Digital IO Connector Board for P878A/H PCI Card
- * Digital IO Connector Board Embedded System
- * DE converter card for 2.5" HDD, 44 pin to 44 pin, support ATA100
- * DE converter card for 2.5" HDD, 40 pin to 44 pin, support ATA100
- * LVDS Converter TTL18bit to LVDS 24bit
- * Video/Audio-Out Connector
- * IDE to CF Slot
- * USB Connector

Additional modules



- * ADSL 2+modem
- * ADSL
- * ISDN
- * Wireless LAN (Chip : VIA VT6655)
- * Wireless LAN (Chip : Ralink RT2561T)



Σταθμοί αυτοεξυπηρέτησης (Kiosks) εσωτερικού και εξωτερικού χώρου

- Πλήρης σειρά από σταθμούς αυτοεξυπηρέτησης (Kiosks) εσωτερικού και εξωτερικού χώρου με έμφαση στη λειτουργικότητα, σωστό σχεδιασμό, αντοχή και ποιότητα κατασκευής.
- Εσωτερικού / εξωτερικού χώρου
- Διαφορετικά μεγέθη
- Πλήθος αξεσουάρ
- ΑΜΕΑ
- Επιτοίχια / Επιδαπέδια

Kiosks

Εσωτερικού χώρου



Smart Kiosk F100



Smart Kiosk F101



Smart Kiosk F102



Smart Kiosk F103



Smart Kiosk F104



Smart Kiosk F105



Smart Kiosk F107



Smart Kiosk W100

Εξωτερικού χώρου



Smart Kiosk W101



Smart Kiosk F106

Smart Kiosk F106
με σκέπαστρο

Ιδανικό kiosk για εσωτερική εγκατάσταση



- Κομψός σχεδιασμός
- Πολλαπλές χρήσεις
- Στιβαρή κατασκευή
- Ηχεία

Ιδανική λύση με πολλά περιφερειακά



- Κομψός σχεδιασμός
- Πολλαπλές χρήσεις
- Στιβαρή κατασκευή
- Ηχεία
- Χρήση σε εσωτερικούς χώρους

Smart Kiosk F101

Specifications

Monitors

- * 15", 17", 19" LCD TFT metal chassis with secure glass protection (no touch)
- * 15", 17", 19" LCD TFT metal chassis with touchscreen sensor

Πληκτρολόγια

- * Metal keyboard with stainless steel trackball

Εκτυπωτές


- * 60mm thermal printer, USB or RS232 interface, cutter
- * 80mm thermal printer, RS232 and USB interface
- * 210mm thermal printer, RS232

Standard Peripherals

- * Central Intelligent Kiosk Unit WatchDog, Alarm, Thermal control
- * Creative WebCam (USB interface)
- * Vandal proof (metal Cord) Telephone handset
- * Wifi kiosk connection
- * UPS

Συστήματα Πληρωμών

- * Manual Hybrid R/W, Smart, Memory and Magnetic card reader, Manual Insertion
- * CCD Bar code reader FS30x, Serial, PS2 or USB connection
- * Laser Bar code reader
- * Coin Selector, 32 active channels up to 16 different coins and tokens, include coin box

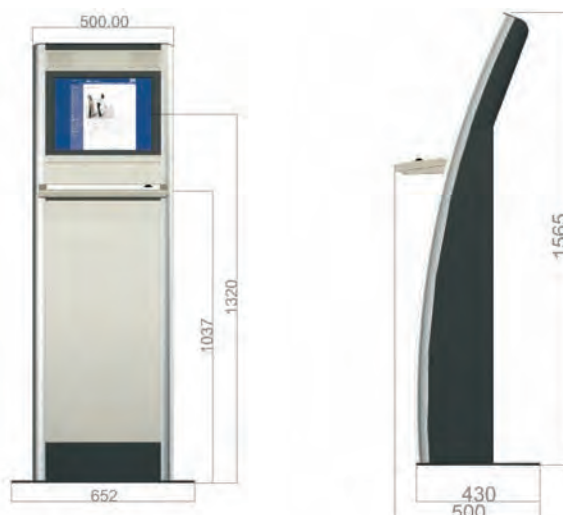

■ Smart Kiosk F102 Smart Kiosk F103



Smart Kiosk F102



Smart Kiosk F103

■ Μεγάλη χωρητικότητα

- Κομψός σχεδιασμός
- Πολλαπλές χρήσεις
- Στιβαρή κατασκευή
- Ηχεία
- Χρήση σε εσωτερικούς χώρους
- Δυνατότητα προσαρμογής 1 ή 2 εκτυπωτών

Smart Kiosk F102 Smart Kiosk F103

Specifications

Monitors

- * 15", 17", 19" LCD TFT metal chassis with secure glass protection (no touch)
- * 15", 17", 19" LCD TFT metal chassis with touchscreen sensor

Πληκτρολόγια

- * Metal keyboard with stainless steel trackball

Εκτυπωτές

- * 60mm thermal printer, USB or RS232 interface, cutter
- * 80mm thermal printer, RS232 and USB interface
- * 210mm thermal printer, Rs232
- * Large Format Laser Printer

Standard Peripherals


- * Central Intelligent Kiosk Unit WatchDog, Alarm, Thermal control
- * Creative WebCam (USB interface)
- * Vandal proof (metal Cord) Telephone handset
- * Wifi kiosk connection
- * UPS

Συστήματα Πληρωμών

- * Manual Hybrid R/W, Smart, Memory and Magnetic card reader, Manual Insertion
- * CCD Bar code reader FS30x, Serial, PS2 or USB connection
- * Laser Bar code reader
- * Coin Selector, 32 active channels up to 16 different coins and tokens, include coin box



Smart Kiosk F102

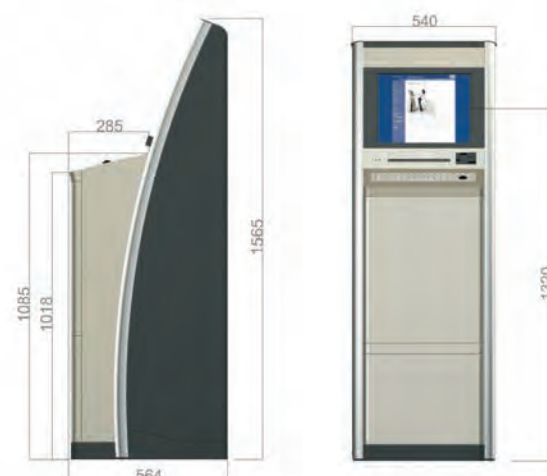

Smart Kiosk F103

Smart Kiosk F100

Specifications

Monitors

- * 15", 17", 19" LCD TFT metal chassis with secure glass protection (no touch)
- * 15", 17", 19" LCD TFT metal chassis with touchscreen sensor

Πληκτρολόγια

- * Metal keyboard with stainless steel trackball

Εκτυπωτές

- * 60mm thermal printer, USB or RS232 interface, cutter
- * 80mm thermal printer, RS232 and USB interface
- * 210mm thermal printer, RS232

Standard Peripherals

- * Central Intelligent Kiosk Unit WatchDog, Alarm, Thermal control
- * Creative WebCam (USB interface)
- * Vandal proof (metal Cord) Telephone handset
- * Wifi kiosk connection
- * UPS

Συστήματα Πληρωμών

- * Manual Hybrid R/W, Smart, Memory and Magnetic card reader, Manual Insertion
- * CCD Bar code reader FS30x, Serial, PS2 or USB connection
- * Laser Bar code reader
- * Coin Selector, 32 active channels up to 16 different coins and tokens, include coin box



■ Μεταβαλλόμενο Υψος



- Κομψός σχεδιασμός
- Πολλαπλές χρήσεις
- Στιβαρή κατασκευή
- Ηχεία
- Χρήση σε εσωτερικούς χώρους

Smart Kiosk F104

Specifications

Monitors

- * 15", 17", 19" LCD TFT metal chassis with secure glass protection (no touch)
- * 15", 17", 19" LCD TFT metal chassis with touchscreen sensor

Πληκτρολόγια

- * Metal keyboard with stainless steel trackball

Εκτυπωτές

- * 60mm thermal printer, USB or RS232 interface, cutter
- * 80mm thermal printer, RS232 and USB interface
- * 210mm thermal printer, RS232

Standard Peripherals

- * Central Intelligent Kiosk Unit WatchDog, Alarm, Thermal control
- * Creative WebCam (USB interface)
- * Vandal proof (metal Cord) Telephone handset
- * Wifi kiosk connection
- * UPS

Συστήματα Πληρωμών

- * Manual Hybrid R/W, Smart, Memory and Magnetic card reader, Manual Insertion
- * CCD Bar code reader FS30x, Serial, PS2 or USB connection
- * Laser Bar code reader
- * Coin Selector, 32 active channels up to 16 different coins and tokens, include coin box



Ιδανική λύση ΑΜΕΑ

- Κομψός σχεδιασμός
- Πολλαπλές χρήσεις
- Στιβαρή κατασκευή
- Ηχεία
- Χρήση σε εσωτερικούς χώρους



Smart Kiosk F105

Specifications

Monitors

- * 15", 17", 19" LCD TFT metal chassis with secure glass protection (no touch)
- * 15", 17", 19" LCD TFT metal chassis with touchscreen sensor

Πληκτρολόγια

- * Metal keyboard with stainless steel trackball

Εκτυπωτές


- * 60mm thermal printer, USB or RS232 interface, cutter
- * 80mm thermal printer, RS232 and USB interface
- * 210mm thermal printer, RS232

Standard Peripherals

- * Central Intelligent Kiosk Unit WatchDog, Alarm, Thermal control
- * Creative WebCam (USB interface)
- * Vandal proof (metal Cord) Telephone handset
- * Wifi kiosk connection
- * UPS

Συστήματα Πληρωμών

- * Manual Hybrid R/W, Smart, Memory and Magnetic card reader, Manual Insertion
- * CCD Bar code reader FS30x, Serial, PS2 or USB connection
- * Laser Bar code reader
- * Coin Selector, 32 active channels up to 16 different coins and tokens, include coin box

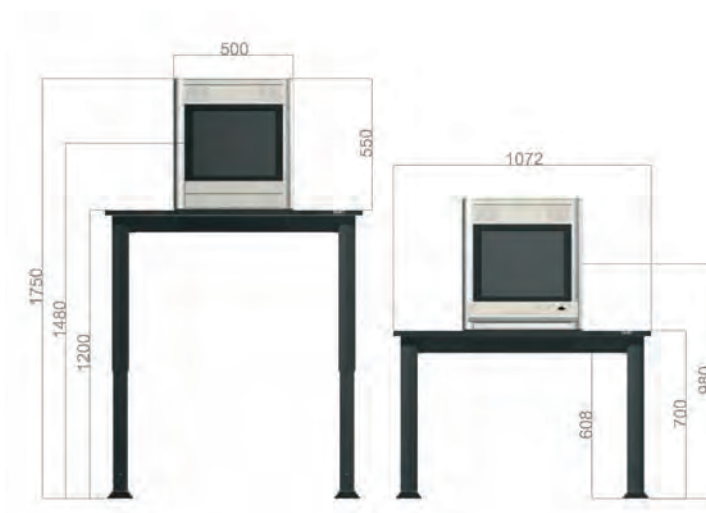

Ιδανική λύση για εξωτερικούς χώρους



- Κομψός σχεδιασμός
- Πολλαπλές χρήσεις
- Στιβαρή κατασκευή
- Ηχεία
- Χρήση σε εσωτερικούς ή εξωτερικούς χώρους

Smart Kiosk F106

Specifications

Monitors

- * 15", 17", 19" LCD TFT metal chassis with secure glass protection (no touch)
- * 15", 17", 19" LCD TFT metal chassis with touchscreen sensor

Πληκτρολόγια

- * Metal keyboard with stainless steel trackball

Εκτυπωτές


- * 60mm thermal printer, USB or RS232 interface, cutter
- * 80mm thermal printer, RS232 and USB interface
- * 210mm thermal printer, RS232

Standard Peripherals

- * Central Intelligent Kiosk Unit WatchDog, Alarm, Thermal control
- * Creative WebCam (USB interface)
- * Vandal proof (metal Cord) Telephone handset
- * Wifi kiosk connection
- * UPS

Συστήματα Πληρωμών

- * Manual Hybrid R/W, Smart, Memory and Magnetic card reader, Manual Insertion
- * CCD Bar code reader FS30x, Serial, PS2 or USB connection
- * Laser Bar code reader
- * Coin Selector, 32 active channels up to 16 different coins and tokens, include coin box

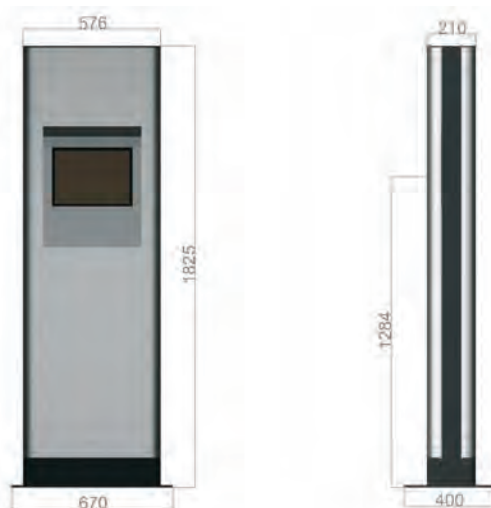

Μικρό Μεγεθος



- Κομψός σχεδιασμός
- Πολλαπλές χρήσεις
- Στιβαρή κατασκευή
- Ηχεία
- Χρήση σε εσωτερικούς χώρους

Smart Kiosk F107

Specifications

Monitors

- * 15", 17", 19" LCD TFT metal chassis with secure glass protection (no touch)
- * 15", 17", 19" LCD TFT metal chassis with touchscreen sensor

Πληκτρολόγια

- * Metal keyboard with stainless steel trackball

Εκτυπωτές


- * 60mm thermal printer, USB or RS232 interface, cutter
- * 80mm thermal printer, RS232 and USB interface
- * 210mm thermal printer, RS232

Standard Peripherals

- * Central Intelligent Kiosk Unit WatchDog, Alarm, Thermal control
- * Creative WebCam (USB interface)
- * Vandal proof (metal Cord) Telephone handset
- * Wifi kiosk connection
- * UPS

Συστήματα Πληρωμών

- * Manual Hybrid R/W, Smart, Memory and Magnetic card reader, Manual Insertion
- * CCD Bar code reader FS30x, Serial, PS2 or USB connection
- * Laser Bar code reader
- * Coin Selector, 32 active channels up to 16 different coins and tokens, include coin box

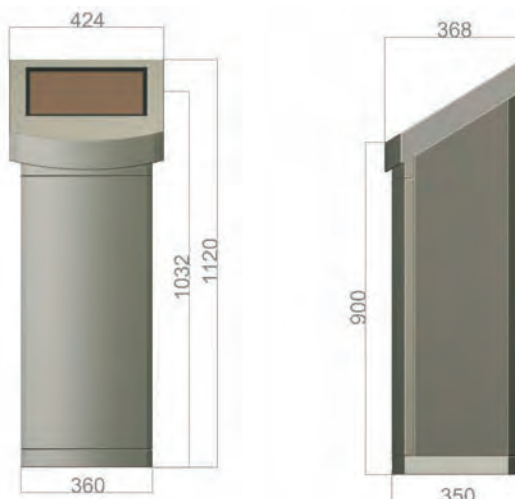

Επιτοίχια λύση για εσωτερικούς χώρους



- Κομψός σχεδιασμός
- Πολλαπλές χρήσεις
- Στιβαρή κατασκευή
- Ηχεία
- Χρήση σε εσωτερικούς χώρους

Smart Kiosk W100

Specifications

Monitors

- * 15", 17", 19" LCD TFT metal chassis with secure glass protection (no touch)
- * 15", 17", 19" LCD TFT metal chassis with touchscreen sensor

Πληκτρολόγια

- * Metal keyboard with stainless steel trackball

Εκτυπωτές

- * 60mm thermal printer, USB or RS232 interface, cutter
- * 80mm thermal printer, RS232 and USB interface
- * 210mm thermal printer, RS232

Standard Peripherals

- * Central Intelligent Kiosk Unit WatchDog, Alarm, Thermal control
- * Creative WebCam (USB interface)
- * Vandal proof (metal Cord) Telephone handset
- * Wifi kiosk connection
- * UPS

Συστήματα Πληρωμών

- * Manual Hybrid R/W, Smart, Memory and Magnetic card reader, Manual Insertion
- * CCD Bar code reader FS30x, Serial, PS2 or USB connection
- * Laser Bar code reader
- * Coin Selector, 32 active channels up to 16 different coins and tokens, include coin box



Επιτοίχια λύση για εξωτερικούς χώρους



- Κομψός σχεδιασμός
- Πολλαπλές χρήσεις
- Στιβαρή κατασκευή
- Ηχεία
- Χρήση σε εσωτερικούς ή εξωτερικούς χώρους

Smart Kiosk W101

Specifications

Monitors

- * 15", 17", 19" LCD TFT metal chassis with secure glass protection (no touch)
- * 15", 17", 19" LCD TFT metal chassis with touchscreen sensor

Πληκτρολόγια

- * Metal keyboard with stainless steel trackball

Εκτυπωτές


- * 60mm thermal printer, USB or RS232 interface, cutter
- * 80mm thermal printer, RS232 and USB interface
- * 210mm thermal printer, RS232

Standard Peripherals

- * Central Intelligent Kiosk Unit WatchDog, Alarm, Thermal control
- * Creative WebCam (USB interface)
- * Vandal proof (metal Cord) Telephone handset
- * Wifi kiosk connection
- * UPS

Συστήματα Πληρωμών

- * Manual Hybrid R/W, Smart, Memory and Magnetic card reader, Manual Insertion
- * CCD Bar code reader FS30x, Serial, PS2 or USB connection
- * Laser Bar code reader
- * Coin Selector, 32 active channels up to 16 different coins and tokens, include coin box

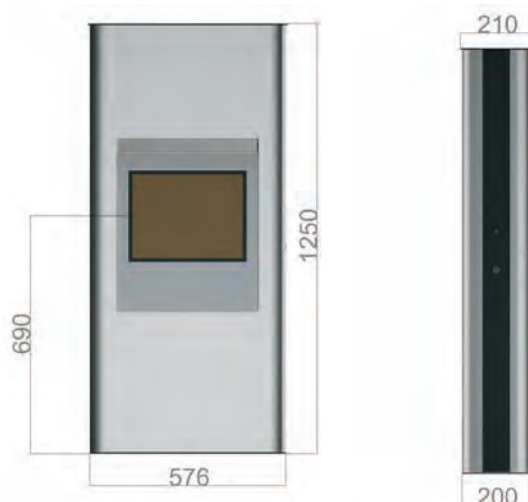

LCD Displays



15" LCD TFT chassis.
Resolution: 1024 x 768.
Brightness 250 or 1500 cd/m² optional.
Contrast 400:1. Analog input.
Touchscreen optional.



17" LCD TFT chassis.
Resolution: 1280 x 1024.
Brightness 250 or 1500 cd/m² optional.
Contrast 450:1. Analog input.
Touchscreen optional.



19" LCD TFT chassis.
Resolution: 1280 x 1024. Brightness
270 cd/m². Contrast 550:1. Analog input.
Touchscreen optional.


Πληκτρολόγια



Metal Keyboard without Trackball
Internet Layout.
National Layouts available.
PS2 or USB Interface.



Metal Keyboard with Trackball
Internet Layout.
National Layouts available.
PS2 or USB Interface.

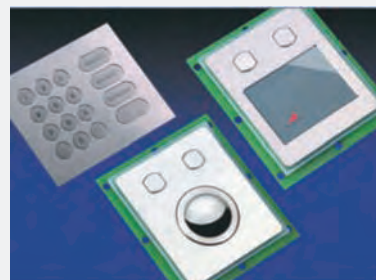

Metal Numpads, Buttons, Trackballs
Touchpads are also available.
PS2, USB or Matrix Interface.

ΕΚΤΥΠΩΤΕΣ



Thermal Printer TG 35/58-T.
Paper width 35 or 58 mm.
Printing speed > 42 mm/sec.



Thermal Printer VKP 80
Paper width 60 or 80 mm. Printing speed
> 220 mm/sec. Paper roll diameter max.



Thermal Printer KPM 210/216H
Paper width 210 or 216 mm. Speed
> 125 mm/sec. Paper roll diameter max

Kiosk Accessories

Αναγνώστες Καρτών



Manual Hybrid Card Reader SCR28. Smart, Memory and Magnetic Card Reader, Manual insertion Drivers and libraries for Windows, CE, Linux. RS232 or USB interface.



Manual Hybrid Card Reader ICM330. Smart and Magnetic Card Reader, Manual insertion, Anti-Intrusion shutter, EMV Approval, RS232 or USB interface.



Motorised Hybrid Card Reader ICM330. Smart and Magnetic Card Reader, 1 SAM socket on board. Anti-Intrusion shutter. EMV Approval. RS232 or USB interface.

Coin & Banknote Acceptors



Bank Note Acceptor NV8. Low-Cost Multi-Currency validator. Currency database for many countries.



Bank Note Acceptor NV9. Advanced reading system. Up to 32 different notes. Currency database for many countries.



Coin Selector EMP 850. 32 active channels. Up to 16 different coins or tokens. Stainless Steel Front Plate. RS232 or USB interface

Άλλα



MiniScan Series Bar Code Readers. 640 Scans per second. Laser, Smart raster pattern. RS232 or USB interface



Telephone Handset. Vandal-proof Metal Cord. PC Sound Card interface.



Web camera. VGA resolution 640 x 480. 60 frames per second. Windows drivers. USB interface.

smarttechnology 

Platonos 124, Kallithea,
Athens, GREECE, 17674

tel.: +30 210 95 36 522
fax: +30 210 94 17 110

sales@smarttechnology.gr
www.smarttechnology.gr
www.fototogo.gr